


Comfort Step ESD

*High-performance
comfort & safety.*

Your workers are your most important asset, so keep them safe and comfortable while increasing productivity. Comfort Step ESD does so by providing a soft yet resilient surface designed to reduce pressure on joints, allowing workers to stand comfortably for longer.

Fire and chemical resistant with excellent static dissipative properties, Comfort Step ESD is the high-performance anti-fatigue matting solution for the most demanding industrial environments.

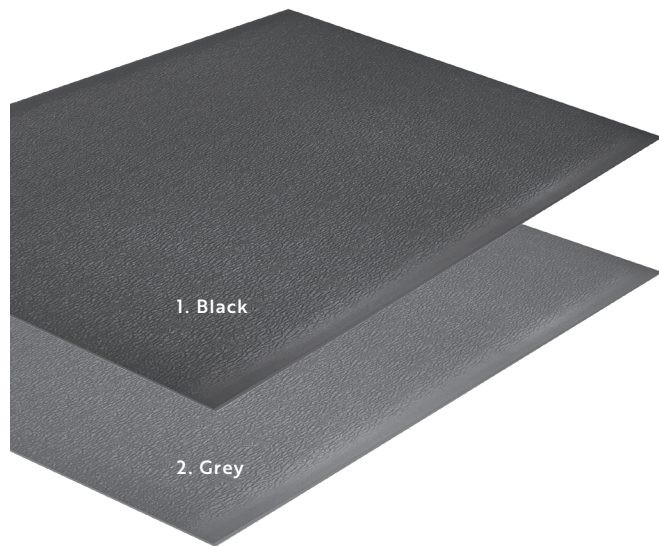

Flooring Solutions that Simplify.
1+ 877 285 8899 • www.porticosystems.com



Anti - Fatigue

Comfort Step ESD

Comfort Step ESD

3/8" INDUSTRIAL ANTI-STATIC | ANTI-FATIGUE MATTING



SUGGESTED USES (NOT LIMITED TO)

Factories, warehouses, server rooms, electronic component and equipment assembly workstations, and any industrial setting where a static-controlled environment is critical.

Manufacturing Process:	Closed-cell expanded PVC sponge
Surface Aspect:	Pebble Emboss
Gauge ($\pm 10\%$):	3/8" (375 mils)
Available Colors:	Black & Grey
Available Sizes:	2' x 3' 3' x 5' 2' x 60' 3' x 60' 4' x 60'

LIMITED WARRANTY

Full Commercial Warranty 1 year
Summary of Warranty:

Portico Systems warrants Comfort Step ESD Industrial Anti-Fatigue Matting against wear for a period of 1 year in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the Warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, Portico Systems will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
Portico Systems warrants Comfort Step ESD Industrial Anti-Fatigue Matting materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one (1) year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This Warranty covers only properly installed & maintained floors.
 - Portico Systems excluded and will not pay for any consequential or incidental expenses.
 - Portico Systems reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet.

Experience It For Yourself

Talk with your sales representative or request samples at samples@porticosystems.com

TECHNICAL SPECIFICATIONS

Density:	20 lbs/ft ³ nominal
Tensile Strength (ASTM D412, Die C):	100 lbs/in ² minimum
Elongation (ASTM D412, Die C):	125% minimum
Tear Strength (ASTM D624, Die C):	20 lbs/sq. in minimum
Durometer (ASTM D2240):	65 \pm 5 (Shore OO)

ELECTROSTATIC PROPERTIES

Static Dissipative Properties: R_{TT} and R_{TC} to be low-to-mid $10^8 \Omega$

FLAMMABILITY

Horizontal Burn Test (DOT FMVSS 302): Pass^{*}
Methenamine Tablet Test (CPSC FF 1-70) Pass, < 1" diameter

MAINTENANCE

Comfort Step ESD can be mopped or wiped clean with a damp cloth.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

NOTES:

YOUR AUTHORIZED SALES REPRESENTATIVE:

