


Monster Tile Series

A classic combination of performance and design


Offered in a wide range of colors, Monster Tile gives you the ability to tailor your space and complement the aesthetics of your gym. The highest quality rubber gym flooring available

100 Series

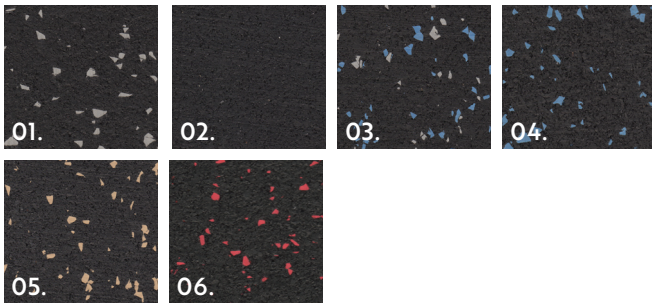


01. Light Grey MT-125 02. Black MT-106 03. Blue/Lt. Grey MT-122
04. Blue MT-127 05. Tan Clay MT-149 06. Red MT-109

350 Series

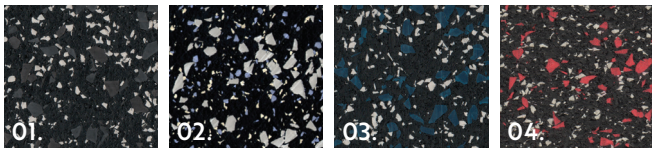

01. Salt and Pepper MT-526 02. Milky Way MT-503 03. Blue Bahia MT-523
04. Rouge MT-524

950 Series

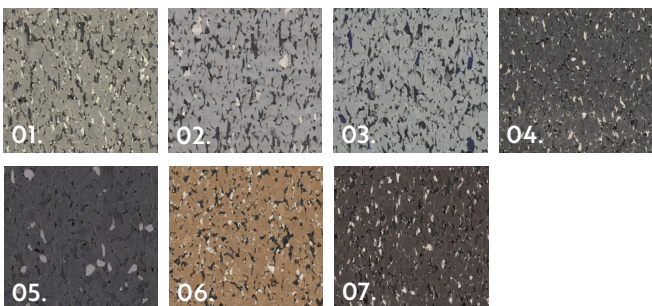

01. Graphite MT-954 02. Avalanche MT-4244 03. Mica MT-951
04. Storm Cloud MT-952 05. Granite Grey MT-4247 06. Sandstorm MT-956
07. Hot Chocolate MT-953



portico
SYSTEMS

Flooring Solutions that Simplify.
1+ 877 285 8899 • www.porticosystems.com



Bottom of Tile

Dowels

Installation



Rubber Flooring

Monster Tile Series

Monster Tile Series

> HEAVY DUTY COMMERCIAL RUBBER FLOORING



SUGGESTED USES

Weight Rooms, Home Gyms, Fitness Centers, Health Clubs, Crossfit (Platforms), Free Weight Areas, Strength & Conditioning Areas, Schools and Universities, Play Areas, and Ice Skating Facilities, etc.

Construction:	100% Recycled SBR Rubber + % selected of EPDM granules & polyurethane binder
Tile Size:	24" x 24" x 1"
Tile Weight:	18.0 lbs./tile
Standard Reducer Dimensions:	1" x 4" x 48"
Standard Reducer Weight:	6 lbs. per reducer
ADA Reducer Dimensions:	1" x 4" x 48"
ADA Reducer Weight:	18 lbs. per reducer
Density Top layer (ASTM D3676):	60-80 pcf (depends on surface color)
Shore A Hardness (ASTM D2240):	60 ± 5
Tear Strength (ASTM D2240):	70 pli min.
Elongation (ASTM D412):	> 75%
Tensile Strength (ASTM D412):	> 200psi
Resistance to Chemicals (ASTM F925):	No Change
Coefficient of Friction (ASTM D2047):	> 0.95
Impact Insulation Class (IIC) (ASTM E492):	STC: > 54, IIC: > 53, ΔIIC: > 24
Critical Radiant Flux (ASTM E648):	Class II
Force Reduction (ASTM F2772):	< 50%

PACKING & DIMENSIONS

Size	Colors	Thickness
24" x 24" x 1" Square Tiles	100 series - 6 colors listed on page 1 only	25.4mm (1") Thick @ 4 sq. ft./Tile
24" x 24" x 1" Square Tiles	350 series - 4 colors listed on page 1 only	25.4mm (1") Thick @ 4 sq. ft./Tile
24" x 24" x 1" Square Tiles	950 series - 7 colors listed on page 1 only	25.4mm (1") Thick @ 4 sq. ft./Tile

NOTE: Dowels or approved adhesive must be used for installation
- 6 dowels needed/ tile

LEED-NC

MR CREDIT 4, IEQ CREDITS 4.1, 5

LIMITED WARRANTY

Full Commercial Warranty

10 years

Summary of Warranty

Products must be professionally installed to validate the warranty. Portico Systems warrants Monster Tiles against wear for a period of 10 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

- Wear
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 5 years from date of purchase, Portico Systems will provide replacement

materials or repair, of only the effected area.

- Manufacturing Defects
Portico Systems warrants Monster Tile materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one (1) year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- Other Limitations
 - This warranty is non-transferable.
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This warranty covers only properly installed & maintained floors.
 - Portico Systems excludes and will not pay for any consequential or incidental expenses.
 - Portico Systems reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet

MAINTENANCE

A regular maintenance program is extremely important and will increase the life of the floor and finish. The frequency of cleaning will depend of the amount of traffic on the floor. For general cleaning, a neutral cleaner should be used.

- Thoroughly sweep or vacuum the floor to remove all loose dirt, dust and debris.
- Apply a neutral cleaner to the floor with a mop (or automatic floor scrubber). Follow the manufacturer's instructions.
- Use a wet vac or mop to remove cleaning solution.
- Rinse floor with clean, cold water. Remove all water with wet vac or mop. Allow rubber floor to dry thoroughly.

IMPORTANT

To prevent slip and fall accidents, ALWAYS use a "WET FLOOR" sign when wet rubber flooring has been cleaned and is open to floor traffic.

NOTICE ON COLOR VARIATION

This product contains recycled rubber materials, including post-consumer tires. While we make every effort to produce your order from the same rubber log for greater color consistency, variations in shade, tone, and fleck distribution are inherent to recycled content. Such variations are normal, cannot be eliminated, and are not considered defects. Exact color matching between pieces or production batches cannot be guaranteed.

YOUR AUTHORIZED SALES REPRESENTATIVE:



experience it for yourself

Talk with your sales representative or request samples at samples@porticosystems.com

Rubber Flooring

Monster Tile Series