


Portico Nop

Elevates any space with its unique look and functionality.

Our most popular logo mat material is not only available in roll goods but tiles too! Featuring warm neutrals, fashionable brights and classic standard colors. Portico Nop Tile is our highest quality product that truly has something for everyone.

- Timeless style and incredible flexibility
- Portico Nop is perfect for most any application
- 54 oz. All-Weather Berber Carpet Tile

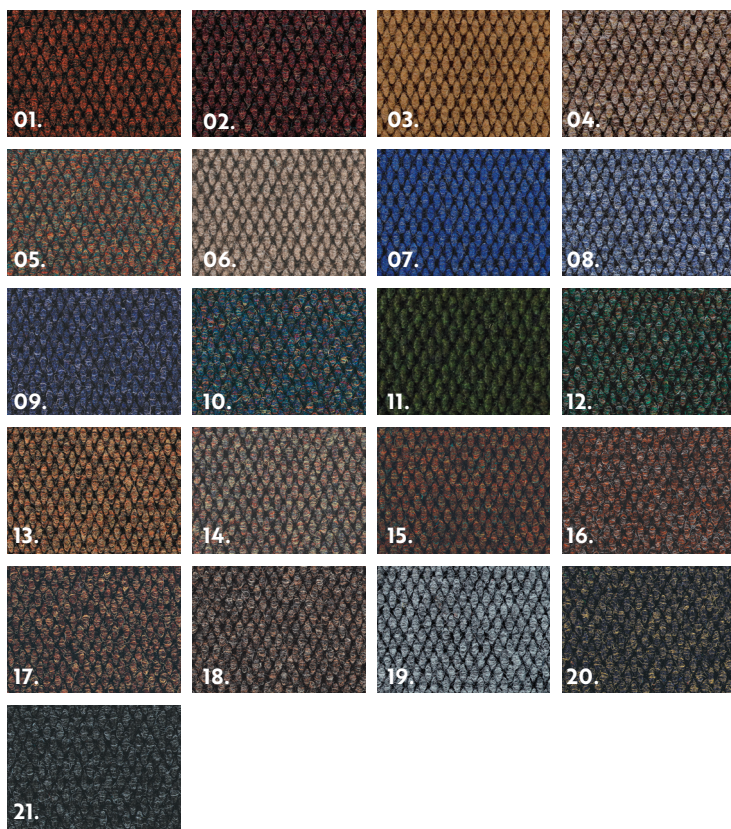

01. Cardinal Red 3353 02. Garnet 3138 03. Coir/Natural 1099 04. Natural Beige 1153
05. Loden 6081 06. Taupe 2345 07. Azure 5181 08. Steel Blue 5157 09. Midnight Blue 5154
10. Prism 5155 11. Verde Green 6043 12. Hunter Green 6022 13. Zinc 7006 14. Autumn 2048
15. Rosewood 7178 16. Chocolate 7097 17. Walnut 7068 18. Teak 7185 19. Sterling 2344
20. Black Shadow 2343 21. Gris/Charcoal 2098



portico
SYSTEMS

Flooring Solutions that Simplify.
1+ 877 285 8899 • www.porticosystems.com



Carpet Tiles

Portico Nop

Portico Nop



> 54 OZ. NEEDLEPUNCHED CONTRACT CARPET TILE

SUGGESTED USES

Office Environments, Airports, Conference Rooms, Lobbies, Libraries, Retail/ Department Stores, Resorts, Restaurant Entryways, Spas, etc.

Manufacturing Process: Non-woven/needlepunched
 Surface Aspect: Hobnail (berber) pattern
 Fiber: 100% Solution-dyed UV stabilized ASOTA® polypropylene
 Backing: Premium (eco) Bitumen

Pile Height (± 0.5mm): 0.25"
 Total Height (± 7.5%): 0.47"
 Pile Weight (± 7.5%): 54 oz./sy
 Total Weight (± 7.5%): 169 oz./sy
 Tile Size (± 2%): 19.69" x 19.69"

LIMITED WARRANTY

Full Commercial Warranty 5 years

Summary of Warranty

Products must be professionally installed to validate the warranty.

Portico Systems warrants Portico Nop Carpet Tiles against wear for a period of 5 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

Wear

Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 1 year from date of purchase, Portico Systems will provide replacement materials or repair, of only the effected area.

Manufacturing Defects

Portico Systems warrants Portico Nop materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

Other Limitations

- This warranty is non-transferable.
- Manufacturing defect must be reported within 3 months from date of purchase.
- This Warranty covers only properly installed & maintained floors.
- Portico Systems excluded and will not pay for any consequential or incidental expenses.
- Portico Systems reserves the right of final judgment and may refuse claims in certain instances.

*For a copy of the full warranty please ask for a warranty sheet.

PACKING & DIMENSIONS

Tiles (19.69" x 19.69" ea.): 12 tiles per box (32.5 sq. ft.)

ELECTROSTATIC PROPERTIES

Dimensional Stability (EN 986): Pass
 Electrostatic Propensity (EN 1815): >2kV
 Electrical Resistivity (IBM / ICL): Pass, for R.H. ≥40%
 Sound Insulation (ISO 10140-1:2010): ≥24dB
 Thermal Retention (ISO 11092): 0.13 m K/W Pass

experience it for yourself

Talk with your sales representative or request samples at samples@porticosystems.com

COLOR FASTNESS

To Light (ISO 105 B02): 5
 To Water (ISO 105 E01): 5
 To Shampoo (ISO 105 C06): 5
 To Rubbing (ISO 105 X12): 4 (Dry), 3-4 (Wet)

FLAMMABILITY

Radiant Panel (ASTM E648) Class II
 Smoke Density (ASTM E662) Pass
 Surface Flammability (FF 1-70 / ASTM D2859) Pass

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 4.3, 5

INSTALLATION (Tile)

Before laying tiles, it is recommended they are stored at room temperature 60°F-70°F (15°C-20°C). The tiles can be loose laid on flat, dry floors free from impurities such as oil, grease etc. Cracked floors should be filled, and uneven floors covered with hardboard. Dusty floors should be primed. Because of the high insulation value of these tiles it is not recommended they be laid when under-floor heating systems are in use. On very large installations, it is advisable to secure 1 in 5 rows with double-sided tape. Where tiles are to be used under caster chairs, tiles should be fully secured. The tiles may be laid by marking across in the center of the room and working outwards from this, the marker cross may be moved to facilitate the use of tiles in doorways, etc. Tiles must be laid by turning alternate tiles through 90 degrees to obtain a checker pattern. An arrow on the back of each tile indicates the pile direction. Only tiles with the same batch number should be laid together.

*For installation and other information, go to porticosystems.com

MAINTENANCE

Regular vacuuming (Weekly in low-traffic areas, and daily or twice daily in areas with higher traffic) with a motor-driven brush and beater bar can remove up to 80% of surface dirt, and is the easiest way to prolong the life of your carpet.

Regular vacuuming is key to maintaining your carpet, but eventually the carpet color dulls from dirt and grime stuck in the fibers. The dirt is then carried further into the building to form more soil reservoirs. Additionally, the oil content (15%) of the soil causes particles to stick to carpet fiber and resist vacuuming. To restore the carpet to its best condition, frequent light cleaning gives the best result and is often very cost effective.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

YOUR AUTHORIZED SALES REPRESENTATIVE:

