


# S-Trax Plus

*Provides a beautiful, linear finished appearance and is functionally unsurpassed.*

This unique vinyl interlocking tile combined with nylon carpet strips, create an entryway that is high on style yet low on maintenance. Super Trax Plus is engineered to withstand heavy foot and wheeled traffic more efficiently than alternative matting systems.

- Varying rows of ribbed vinyl and nylon carpet strips scrape and dry the foot traffic
- Dissipating spillages and debris
- Vinyl tiles made from 100% recycled PVC
- Effective matting for entrances and foyers

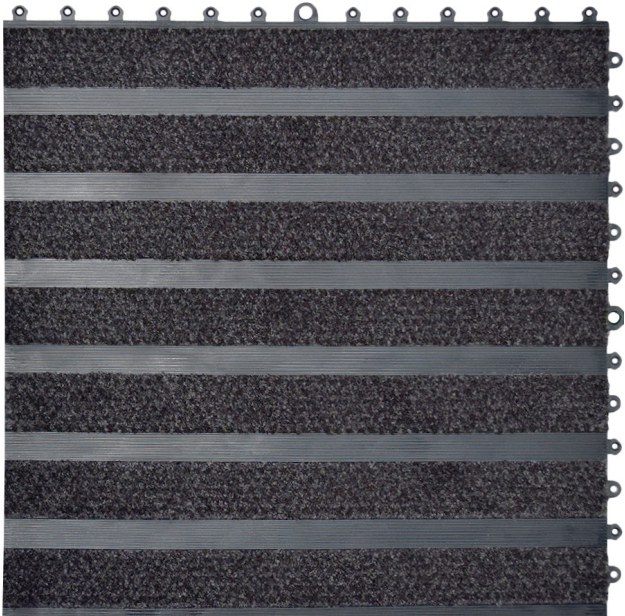

01. Dark Grey



**Flooring Solutions that Simplify.**  
1+ 877 285 8899 • [www.porticosystems.com](http://www.porticosystems.com)



Grid Matting

S-Trax Plus

# S-Trax Plus



## > GRID MATTING SYSTEMS

### SUGGESTED USES

All medium-high traffic indoor locations.

### GRID SPECIFICATIONS

Carpet/Grid Composition:	Tufted Carpet/Ribbed vinyl
Carpet Fiber:	See specs below under carpet properties
Overall Thickness:	9/16"   15mm
Grid Thickness:	7/16"   11mm
Total Product Weight:	5.22 lbs. per tile
Tile Size:	19.69" x 19.69"
Carpet Strip Width:	2" wide
Packaging:	12 tiles (32.5 sq. ft.; 62 lbs.) / carton

### LIMITED WARRANTY

3 years pro-rated

Ask for warranty sheet for details

### CARPET PROPERTIES

Manufacturing Process:	Tufted
Surface Aspect:	Cut Pile
Fiber:	PA6 Nylon
Backing:	PVC
Pile Height (± 0.5mm):	0.20"
Total Height (± 7.5%):	0.301"
Pile Weight (± 7.5%):	23.65 oz/sy
Total Weight (± 7.5%):	101.79 oz/sy

### MAINTENANCE

**Vacuuming:** Proper vacuuming is the single most important part of a preventive maintenance program. The following should be taken into consideration for how often to vacuum; Snap Trax location, appearance expectations, type of vacuum equipment available, anticipated traffic upon each location, and soiling conditions prevalent to the location.

**Spot Cleaning:** For maintaining an appearance level, spots and stains can be the greatest challenge. The key to successfully removing a spot or stain is immediate action. This requires daily inspections. For a spill, blot immediately with a clean, white absorbent cloth, and work from the edge of the spot towards the center to help prevent it from spreading. Spots should be removed using an industrial grade spot remover. For oily stains a nonflammable dry cleaning solvent works best. When it comes to chewing gum, a can of freezing solution will easily break down the gum to be vacuumed away.

Periodic Maintenance (as needed).

For Restorative Carpet Cleaning processes please contact your Portico Systems sales representative.

LEED-NC

Version 3 IEQ Credit 5, 4.3 | MR Credit 4, 6

experience it for yourself

Talk with your sales representative or request samples at [samples@porticosystems.com](mailto:samples@porticosystems.com)

### INSTALLATION

**Preparation:** Before commencing installation, visually check the area and remove any lumps or ridges in the base that may be present. Vacuum and/or sweep as needed.

It is recommended that the entrance flooring system be installed as one of the final jobs to avoid damage associated with general building works. Unpack and inspect all materials to ensure they are free from transport damage. Check all components and tools required are available. Unpack the tiles and lay in a clean dry protected area to acclimatise and relax. Depending on duration of storage and ambient temperature, this process may take up to 24 hours. A heat gun can be used to aid relaxation of the tiles. When handling the tiles at any time during the installation, avoid dragging or rough handling that may cause stretching or distortion. Must apply cyanoacrylate adhesive (Super Glue) to the locking pins during install.

**Tools Required:** Square, utility knife, a drill with 1/8" and 5/16" bits, a #2 phillips fastener and a tape measure, a rubber mallet and cyanoacrylate Adhesive medium viscosity.

For more information on how to install S-Trax in your space, contact your Portico Systems sales representative.

YOUR AUTHORIZED SALES REPRESENTATIVE:



Grid Matting

S-Trax Plus